



# OLP-EB 261kWh

## Liquid-Cooled DC Battery Cabinet

The OLP-EB 261kWh outdoor Liquid-cooled energy storage cabinet highly integrates the battery system (5 battery packs), BMS, thermal management, and fire protection system into a single standardized enclosure. It supports standalone operation or flexible parallel connection of multiple units with the PCS. Featuring advantages such as a small footprint, high reliability, easy installation, flexible scalability, and high system efficiency, this product is widely applicable in scenarios including microgrids, emergency backup power, peak load shaving and valley filling, and distributed renewable energy accommodation.

### PRODUCT FEATURES



#### Super Safety

- o Self-developed BMS, to achieve electrical protection of "Pack - Cluster - Cabinet".
- o Comprehensive fire detection and multiple fire protection. The entire cabinet, detected by combustible gas, smoke, temperature, and waterlogging sensor, is equipped with aerosol fire extinguishing system.

#### High Energy Density & Flexible Deployment

- o High energy density saves floor space.
- o Supports hoisting and forklift installation, with side-by-side and back-to-back deployment options to suit various site conditions.

#### Plug-and-Play & Smart Maintenance

- o Pre-installed and pre-commissioned at the factory for plug-and-play on site.
- o Supports on-line cloud monitoring, remote configuration, and OTA upgrades, reducing maintenance costs.


#### Wide Application, Reliable Green Power

- o Suitable for areas with no or insufficient power supply.
- o Supports peak shaving and valley filling, backup power, frequency regulation, capacity expansion, and renewable energy fluctuation smoothing, delivering stable green electricity.


## TECHNICAL PARAMETER

Model	OLP-EB-V832_E261-LO
Cell Type	LFP 3.2 V / 314 Ah
Pack Configuration	1 P 52 S / 52.2kWh
Charge / Discharging Rate	0.5 P / 0.5 P
Rated Charging / Discharging Current	157 A / 157 A
Maximum Charging / Discharging Current	200 A / 200 A
Battery System Configuration	1P260S
Rated Energy	261 kWh
Rated Voltage	832 V
Voltage Range	728 ~ 949 V
Number of Battery Packs	5
Cooling Method	Liquid-cooled
Fire Suppression System	Temperature detectors + Smoke detector + Aerosol
Communication Interface	Modbus RTU, Modbus TCP, CAN
Dimension(W*D*H)	1000× 1440 × 2340mm
Weight	Approx. 2450 kg
Ingress Protection (IP) Rating	IP54
Charge / Discharge Temperature	0 ~ 45 °C / -20 ~ 45 °C
Storage Temperature	-20 ~ 45 °C
Relative Humidity	0% ~ 95%RH (No condensation)
Application Altitude	≤3000 m(Derate when over 2000m)
Number of Parallel Battery Cabinets	10 Sets
Standards & Certificates	UN38.3; IEC62619; IEC62040

## INSTALLATION DIMENSIONS

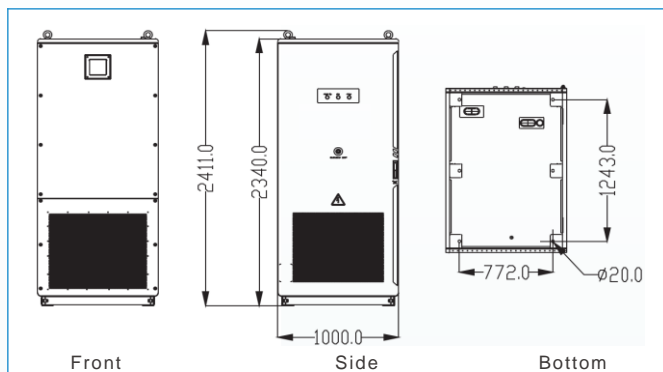

## TYPICAL APPLICATION

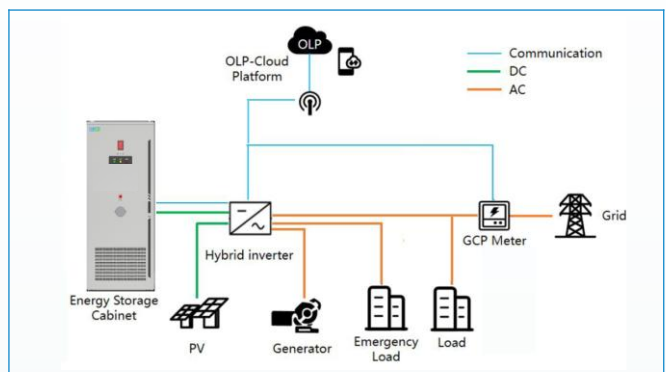

**OLiPower Energy & Automation Technology Co., Ltd**

1001, Block A, Building 2, Shangzhi Technology Park, No.380 Guangming Avenue,

Tangwei Community, Fenghuang Street, Guangming District, Shenzhen City, Guangdong Province

+86 (755) 2650 8686

sales@olipower.cn



Welcome to follow  
discover  
more company information